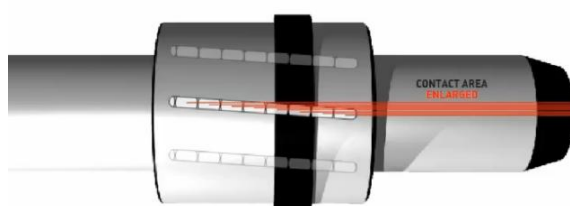



BUSH REF. 737

free **LUB****MODIFIED
ROLLING CHANNELS**

- With inclination.
- With channel grouping.

**INNER RECIRCULATION
WITH SOLID LUBRICANTS**

- Emergency lubricant.
- Manufactures for use solid lubricants.
- Without maintenance.
- Continuously grasing balls.

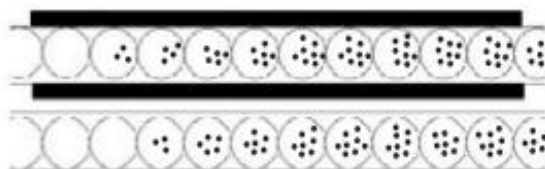**GREASE RETAINERS**

- Two grease retainers included in the ends.
- Made of 190°C resistant material.
- Prevents inner lubricant from being lost.
- Prevents outer particles from getting inside.

**DOUBLE CONTACT
CHANNELS**

A new distribution for a bigger load work
Up to +25% of load allowed.

**WORKING TEMPERATURE**

-5° up to 190°C

MANUFACTURING DIAMETERS

Model B737: Ø12, Ø18, Ø24,
Ø30 and Ø40